

ViewSonic® PROJECTOR PG703X

Key Features

- 4000 lumens and a 22000:1 contrast ratio
- Long lasting lamp life of up to 15000hrs
- Dual HDMI input and MHL support
- LAN control support - Crestron, AMX and PJ Link
- Auto power on




Product Description

The ViewSonic PG703X is a high brightness XGA projector with 4000 ANSI lumens and a 22,000:1 contrast ratio that projects the finest detail regardless of the amount of ambient light in any medium sized space, such as a meeting room or classroom. The PG703X comes with an energy-saving SuperEco mode that reduces power consumption and extends lamp life to 15,000 hours, reducing the frequency of lamp replacement and lowering maintenance costs. In addition to dual HDMI inputs (MHL), S-Video, and VGA out, the PG703X includes RS232 and LAN connectivity, and is certified by Crestron, AMX and PJ Link networkable solutions, making it easy to control and monitor remotely.



01. Keypad
02. LED indicator
03. Lamp cover
04. Security Lock
05. Zoom/Focus
06. Front IR
07. Projection Lens

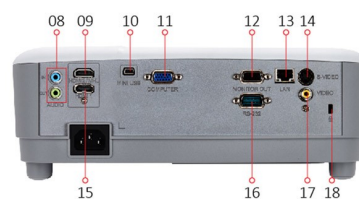

08. Audio in/out
09. HDMI/ MHL
10. Mini USB for Service
11. VGA
12. VGA out
13. LAN
14. S-Video

15. HDMI
16. RS232
17. Video
18. Kensington® Lock Slot

Visit Us  www.viewsonic.com

SPECIFICATION

Native Resolution:	1024x768
DC type:	DC3
Brightness:	4000lm
Contrast Ratio with SuperEco mode:	22000:1
Display Colour:	1.07 Billion Colours
Light Source:	Lamp
Light source life (Nor/SuperEco):	4000/15000
Lamp Watt:	240W
Lens:	F=2.56-2.68, f=22-24.1 mm
Projection Offset:	120%+/-5%
Throw Ratio:	1.96-2.15
Image size:	30" - 300"
Throw Distance:	1.19m-13.11m(100" @3.98m)
Keystone:	±40° (Vertical)
Optical Zoom:	1.1x
Audible Noise (Eco):	27dB
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1083p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K~102KHz
Vertical Scan Rate:	23~120Hz

INPUT

Computer in (share with component):	1
Composite:	1
S-video:	1
Audio-in (3.5mm):	1
HDMI:	1 (Back)
HDMI/MHL:	1 (Back)

OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W

CONTROL

RS232:	1
RJ45:	1
USB type mini B (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
Power Consumption:	Normal: 350W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.4kg
Dimensions (WxDxH) w/adjustment foot:	294x218x110mm
Language:	English, France, Spanish, Thai, Korea, Germany, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnam

STANDARD ACCESSORY

Power Cord:	1
VGA cable:	1
Remote Control:	1 (w/Laser pointer)
QSG & CD:	1

OPTIONAL ACCESSORY

Warranty Card:	Yes (CN Only)
Air Filter:	RSPL