

# ViewSonic® PROJECTOR PG707W


## Key Features

- Larger screen size with lower cost-per-inch
- Throw ratio match & 1.3x zoom for hassle-free equipment upgrade
- Energy-efficient 20,000 hours lamp life
- Comprehensive LAN control for efficient management
- H/V Keystone adjustment enabling side projection



## Product Description

The ViewSonic PG707W is a 4,000 ANSI Lumens WXGA value business/education projector. With a throw ratio that matches mainstream installation conditions and 1.3x optical zoom, it serves as a hassle-free upgrade choice for users to easily get bright and large images with low cost-per-inch in small-to-medium meeting/training rooms. Adding on to that are the energy-efficient 20,000 hours long lamp life and comprehensive LAN control compatibility, making it even more favorable to cost-effective and efficient management.

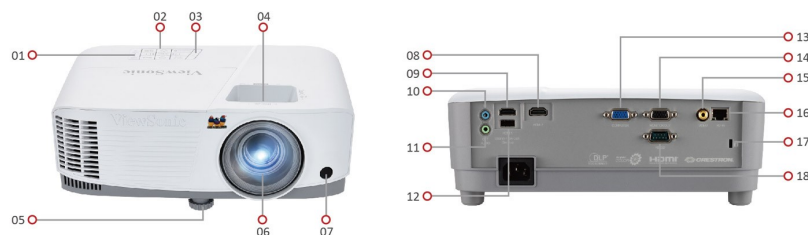

1. LED Indicator
2. Keypad
3. Power Key
4. Zoom/Focus Ring
5. Adjustment Foot
6. Lens
7. Front IR

8. HDMI 2
9. HDMI 1
10. Audio In
11. Audio Out
12. USB Type A(5V/1.5A)
13. Computer In
14. Monitor Out

15. Video
16. RJ45
17. Kensington Lock
18. RS232

Visit Us  [www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

Native Resolution:	1280x800
DMD Type:	DC3
Brightness:	4000 (ANSI Lumens)
Contrast Ratio with SuperEco Mode:	22000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Lamp
Light Source Life (hours) with Normal Mode:	6000
Light Source Life (hours) with SuperEco Mode:	20000
Lamp Watt:	203W
Lens:	F=2.59-2.87, f=16.88-21.88mm
Projection Offset:	120%+/-5%
Throw Ratio:	1.21-1.57
Optical Zoom:	1.3x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	0.78m-10.14m, (100"@2.61m)
Keystone:	H:+/-40° , V:+/-40°
Audible Noise (Normal):	32dB
Audible Noise (Eco):	28dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

**INPUT**

Computer in (share with component):	1
Composite:	1
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

**OUTPUT**

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W
USB Type A (Power):	1 (5V/1.5A)

**CONTROL**

RS232 (DB 9-pin male):	1
RJ45 (LAN control):	1

**OTHERS**

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz , (AC in)
Power Consumption:	Normal: 280W, Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	2.33kg
Dimensions (WxDxH) with Adjustment Foot:	294x218x110mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages

**STANDARD ACCESSORY**

Power Cord:	1
VGA Cable:	1
Remote Control:	1 , (w/ laser pointer)
QSG:	1

**OPTIONAL ACCESSORY**